


# ダイナウォールSタイプ

福岡 熊本 佐賀 長崎 大分 宮崎 鹿児島 沖縄

## ■設計条件

■上載荷重	$q=10\text{kN/m}^2$
■土のせん断抵抗角	$\phi=30^\circ$
■土の単位体積重量	$\gamma=19\text{kN/m}^3$
■摩擦係数	$\mu=0.6$

## ■寸法図

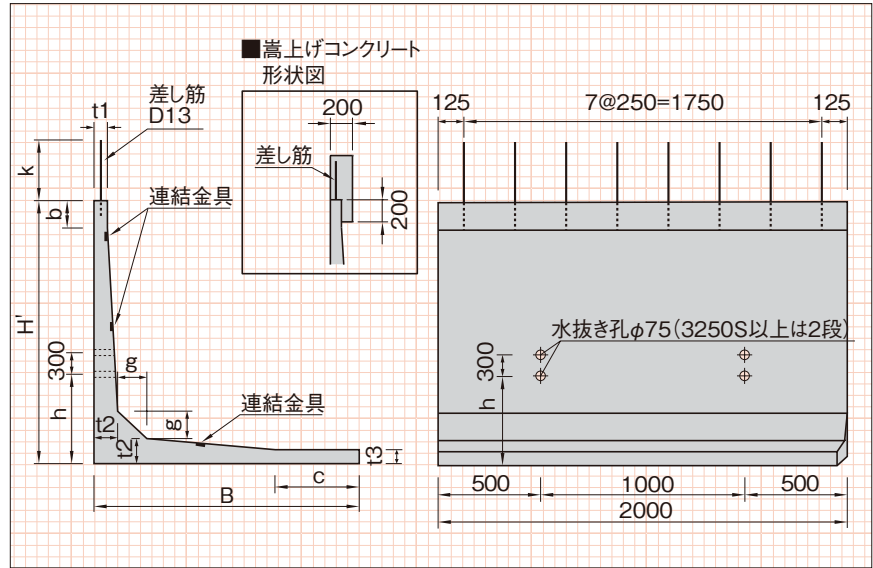

## ■寸法表

(単位:mm)

呼び名	H'	k	B	b	c	t1	t2	t3	g	h	参考重量 (kg)	必要地耐力 (kN/m <sup>2</sup> )
600 S 250	350	200	650	150	450	100	100	100	100	300	466	24
800 S 250	550	200	750	350	550	100	100	100	100	400	613	34
1000 S 250	750	200	900	550	700	100	100	100	100	650	784	41
1250 S 500	750	200	1050	550	850	100	100	100	100	650	858	52
1250 S 250	1000	200	1050	800	850	100	100	100	100	650	980	52
1500 S 500	1000	200	1200	800	1000	100	100	100	100	750	1054	62
1500 S 250	1250	200	1200	1050	1000	100	100	100	100	750	1176	62
1750 S 500	1250	450	1350	—	500	100	120	100	130	750	1372	72
1750 S 250	1500	200	1350	250	500	100	120	100	130	750	1495	72
2000 S 500	1500	450	1500	—	500	100	130	100	130	750	1651	82
2000 S 250	1750	200	1500	250	500	100	130	100	130	750	1773	82
2250 S 500	1750	450	1650	—	500	100	150	100	150	800	2040	92
2250 S 250	2000	200	1650	250	500	100	150	100	150	800	2162	92
2500 S 500	2000	450	1800	—	500	100	180	100	150	800	2535	102
2500 S 250	2250	200	1800	250	500	100	180	100	150	800	2657	102
2750 S 500	2250	450	1950	—	500	100	200	100	200	1000	3063	112
2750 S 250	2500	200	1950	250	500	100	200	100	200	1000	3185	112
3000 S 500	2500	450	2100	—	500	100	230	100	200	1000	3673	123
3000 S 250	2750	200	2100	250	500	100	230	100	200	1000	3795	122
3250 S 500	2750	450	2200	—	300	113	300	100	300	700	5140	136
3250 S 250	3000	200	2200	100	300	100	300	100	300	700	5268	136
3500 S 500	3000	450	2350	100	450	100	300	100	300	700	5341	146
3500 S 250	3250	200	2350	350	450	100	300	100	300	700	5464	146
3750 S 500	3250	450	2500	—	300	114	350	100	300	790	6661	156
3750 S 250	3500	200	2500	100	300	100	350	100	300	790	6787	156
4000 S 500	3500	450	2650	100	450	100	350	100	300	790	6860	165
4000 S 250	3750	200	2650	350	450	100	350	100	300	790	6983	165
4250 S 500	3750	450	2800	—	300	112	350	100	350	870	7685	175
4250 S 250	4000	200	2800	100	300	100	350	100	350	870	7809	175
4500 S 500	4000	450	2950	100	450	100	350	100	350	870	7883	184
4500 S 250	4250	200	2950	350	450	100	350	100	350	870	8005	184
4750 S 500	4250	450	3100	—	300	112	400	100	350	950	9402	195
4750 S 250	4500	200	3100	100	300	100	400	100	350	950	9635	195
5000 S 500	4500	450	3250	100	450	100	400	100	350	950	9708	204
5000 S 250	4750	200	3250	350	450	100	400	100	350	950	9831	204