

SKウォール(佐賀)



福岡 熊本 佐賀 長崎 大分 宮崎 鹿児島 沖縄

設計条件



■上載荷重	$q=10\text{kN/m}^2$
■土のせん断抵抗角	$\phi=30^\circ$
■土の単位体積重量	$\gamma=19\text{kN/m}^3$
■摩擦係数	$\mu=0.6$

寸法図

■H=600~1000用

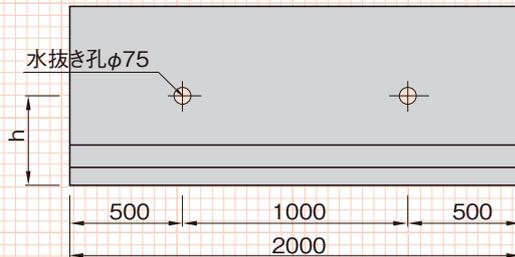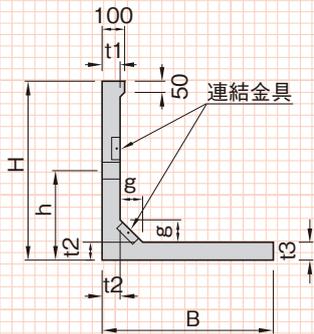

■H=1200~3000用

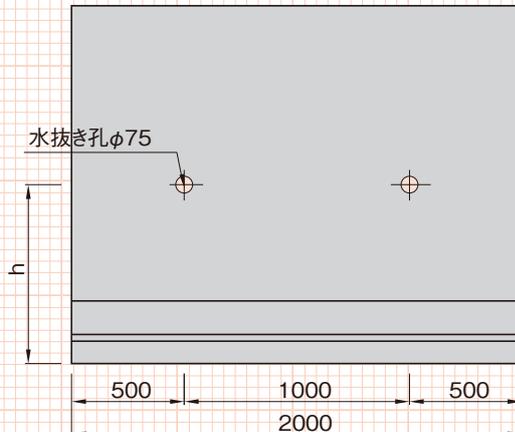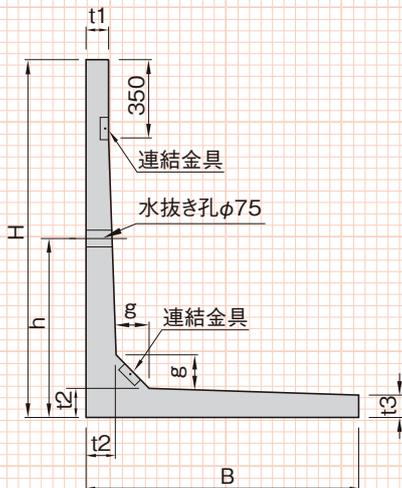

寸法表

(単位: mm)

呼び名 H	B	t1	t2	t3	g	h	参考重量 (kg)	必要地耐力 (kN/m^2)
600	680	70	70	70	100	300	458	26
800	760	80	80	80	100	400	623	36
1000	850	90	90	90	100	500	820	46
1200	970	100	100	100	120	600	1071	54
1400	1090	100	120	100	120	700	1340	63
1600	1210	100	130	100	150	800	1604	71
1800	1330	100	140	100	150	800	1860	79
2000	1450	100	150	100	150	800	2132	87
2250	1600	100	170	100	180	900	2597	97
2500	1750	100	180	100	180	900	2968	107
2750	1900	100	200	100	200	1000	3500	117
3000	2050	100	220	100	200	1000	4045	127